



OOO "DA YUAN TEX SERVICE"

2017 model Range of precision planter for maize or soya




Адрес: Узбекистан, Ташкент Сергелийский район, ул.Сугдиёна 22а
Тел: (+99899) 840-67-89
E-mail: Dayuantextservice1208@mail.ru
Web: www.dayuantextservice.ru



OOO "DA YUAN TEX SERVICE"

2BYFSF—6A

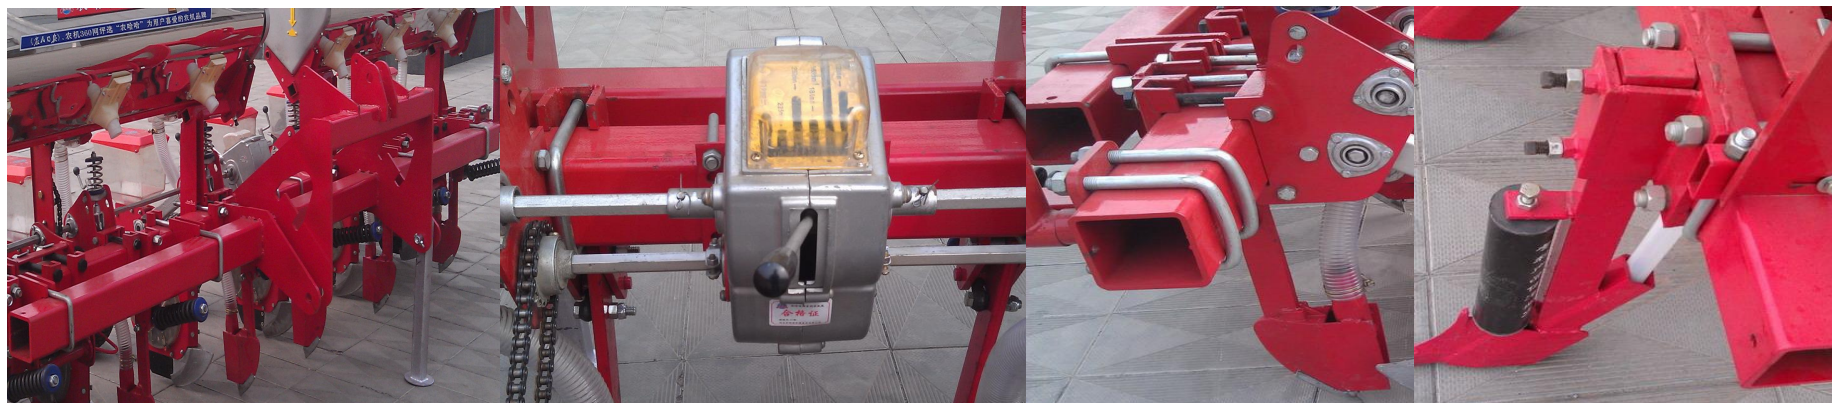

Reinforced type three suspension planting spacing gearbox
加强型机架（6行） 株距齿轮箱

Reinforced type main beam (100*100*6mm)
加强单梁

solid fertilize opener (optional)
实心仿缠施肥开沟器

MODEL	U.M	2BYFSF—8A	2BYFSF—6A
Overall dimensions(L×W×H)	mm	1600×4500×1350	160×3600×1350
weight	(kg/set)	990	830
Power Required	(kw/hp)	≥66.2kw/90hp	≥44.1kw/60hp
Working width	cm	420	340
Main beam material	(mm)	100×100×6	100×100×6
rows number	n.r.	8	6
Row distance	(cm)	60	60
Planting distance	(cm)	140、 190、 210、 260、 290、 360	140、 190、 210、 260、 290、 360
Furrowing depth	(cm)	6-8	6-8
Fertilizer depth	(cm)	6-8	6-8
Seeding depth	(cm)	3-5	3-5
Max. fertilizing quantity	kg/ha.	2100	2100
Max. seeding quantity	(kg/ha.)	22.5-37.5	22.5-37.5
Fertilizer hopper capacity	I.	260×2	195×2
Seeds hopper capacity	I.	8.5×8	8.5×6
Working efficiency	(Ha./hour)	0.9~1.5	0.7~1.0

Адрес: Узбекистан, Ташкент Сергелийский район, ул.Сугдиёна 22а
Тел: (+99899) 840-67-89
E-mail: Dayuantextservice1208@mail.ru
Web: www.dayuantextservice.ru